

CR-ATN02 Series
2W Attenuators
Key Features


- Support frequency range from 0 to 6GHz
- High power capacity
- Compact design, small size and light weight
- Customizable products are available


Specifications

Models	CR-ATN02-**-3N (Indoor) CR-ATN02-**-3NR (Outdoor) (1-30dB Attenuating Value)	CR-ATN02-**-6N (Indoor) CR-ATN02-**-6NR (Outdoor) (1-30dB Attenuating Value)
Attenuating Value	1-30dB	
Frequency	0-3GHz	0-6GHz
Power Capacity	2W	
VSWR	<1.2	<1.25
Attenuation Tolerance	1-10dB ±0.6dB 11-20dB ±0.8dB 21-30dB ±1.0dB	
Impedance	50Ω	
RF Connection	N-F/M (SMA, DIN, BNC option)	
Temperature Range	-40- +50 °C	
Size	Φ20×58 mm	
Weight	56g	

Model

Models		PIM Value
CR-ATN02-**-3N-C	CR-ATN02-**-6N-C	-100dBc-- -110dBc
CR-ATN02-**-3NR-C	CR-ATN02-**-6NR-C	
CR-ATN02-**-3N-B	CR-ATN02-**-6N-B	-120dBc-- -130dBc
CR-ATN02-**-3NR-B	CR-ATN02-**-6NR-B	
CR-ATN02-**-3N-A	CR-ATN02-**-6N-A	Less than -140dBc
CR-ATN02-**-3NR-A	CR-ATN02-**-6NR-A	

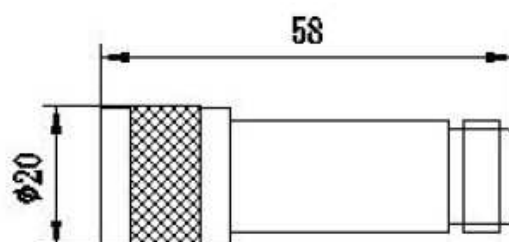

尺寸单位 (dimension): mm