

CR-ATN200 Series
200W Attenuators
Key Features


- Support frequency range from 0 to 6GHz
- High power capacity
- Compact design, small size and light weight
- Customizable products are available


Specifications

Models	CR-ATN200-**-3N (Indoor) CR-ATN200-**-3NR (Outdoor) (1-30dB Attenuating Value)	CR-ATN200-**-6N (Indoor) CR-ATN200-**-6NR (Outdoor) (1-30dB Attenuating Value)	
Attenuating Value	1-30dB		
Frequency	0-3GHz	0-6GHz	
Power Capacity	200W		
VSWR	<1.2	<1.3	
Attenuation Tolerance	1-10dB ± 0.6 dB	11-20dB ± 0.8 dB	21-30dB ± 1.0 dB
Impedance	50 Ω		
RF Connection	N-F/M (SMA, DIN, BNC option)		
Temperature Range	-40- +50 $^{\circ}$ C		
Size	230 \times 160 \times 87 mm		
Weight	4.2kg		

Model

Models	PIM Value	
CR-ATN200-**-3N-C CR-ATN200-**-3NR-C	CR-ATN200-**-6N-C CR-ATN200-**-6NR-C	-100dBc-- -110dBc
CR-ATN200-**-3N-B CR-ATN200-**-3NR-B	CR-ATN200-**-6N-B CR-ATN200-**-6NR-B	-120dBc-- -130dBc
CR-ATN200-**-3N-A CR-ATN200-**-3NR-A	CR-ATN200-**-6N-A CR-ATN200-**-6NR-A	Less than -140dBc

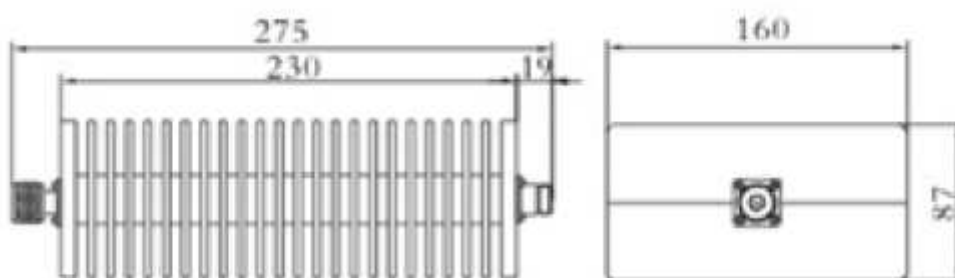

尺寸单位 (dimension): mm