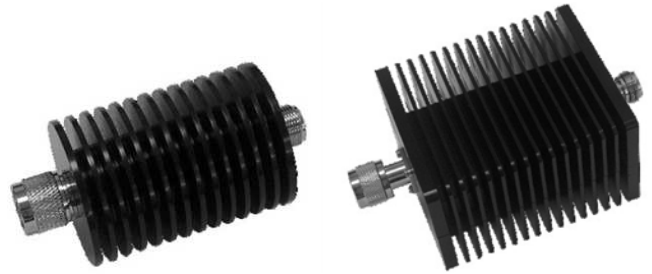


CR-ATN30 Series
30W Attenuators
Key Features


- Support frequency range from 0 to 6GHz
- High power capacity
- Compact design, small size and light weight
- Customizable products are available


Specifications


Models	CR-ATN30-**-3N (Indoor) CR-ATN30-**-3NR (Outdoor) (1-30dB Attenuating Value)	CR-ATN30-**-6N (Indoor) CR-ATN30-**-6NR (Outdoor) (1-30dB Attenuating Value)
Attenuating Value	1-30dB	
Frequency	0-3GHz	0-6GHz
Power Capacity	30W	
VSWR	<1.2	<1.3
Attenuation Tolerance	1-10dB ± 0.6 dB 11-20dB ± 0.8 dB	21-30dB ± 1.0 dB
Impedance	50 Ω	
RF Connection	N-F/M (SMA, DIN, BNC option)	
Temperature Range	-40- +50 °C	
Size	$\Phi 45 \times 104$ mm (or $100 \times 70 \times 50$ mm)	
Weight	230g (630g)	

Model

Models	PIM Value	
CR-ATN30-**-3N-C CR-ATN30-**-3NR-C	CR-ATN30-**-6N-C CR-ATN30-**-6NR-C	-100dBc-- -110dBc
CR-ATN30-**-3N-B CR-ATN30-**-3NR-B	CR-ATN30-**-6N-B CR-ATN30-**-6NR-B	-120dBc-- -130dBc
CR-ATN30-**-3N-A CR-ATN30-**-3NR-A	CR-ATN30-**-6N-A CR-ATN30-**-6NR-A	Less than -140dBc

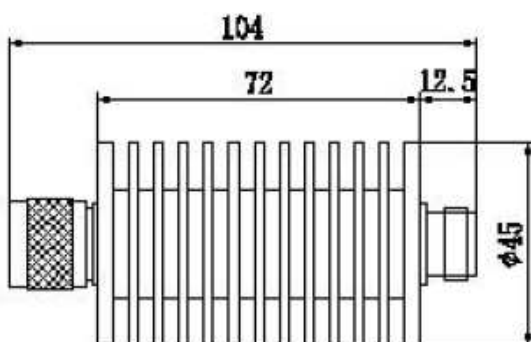

尺寸单位 (dimension): mm

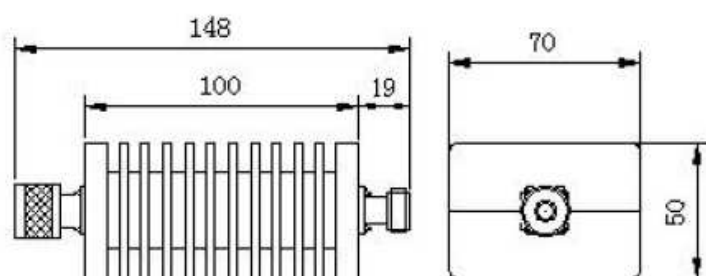

尺寸单位 (dimension): mm